


Hex Length Table	
FCXXXX	Length (L)
FC4120	1/4
FC4121	5/16
FC4122	3/8
FC4123	7/16
FC4124	1/2
FC4125	9/16
FC4126	5/8
FC4127	11/16
FC4128	3/4
FC4129	13/16
FC4130	7/8
FC4131	15/16
FC4132	1
FC4133	1-1/16
FC4134	1-1/8
FC4135	1-3/16
FC4136	1-1/4
FC4137	1-5/16
FC4138	1-3/8
FC4139	1-7/16
FC4140	1-1/2
FC4141	1-9/16
FC4142	1-5/8
FC4143	1-11/16
FC4144	1-3/4
FC4145	1-13/16
FC4146	1-7/8
FC4147	1-15/16
FC4148	2
FC4149	2-1/8
FC4150	2-1/4
FC4151	2-3/8
FC4152	2-1/2
FC4153	2-5/8
FC4154	2-3/4
FC4155	2-7/8
FC4156	3
FC4157	3-1/4
FC4158	3-1/2
FC4159	3-3/4
FC4160	4
FC4161	4-1/4
FC4162	4-1/2
FC4163	4-3/4
FC4164	5
FC4165	5-1/4
FC4166	5-1/2
FC4167	5-3/4
FC4168	6

## 3/8 Round Male-Female Standoff

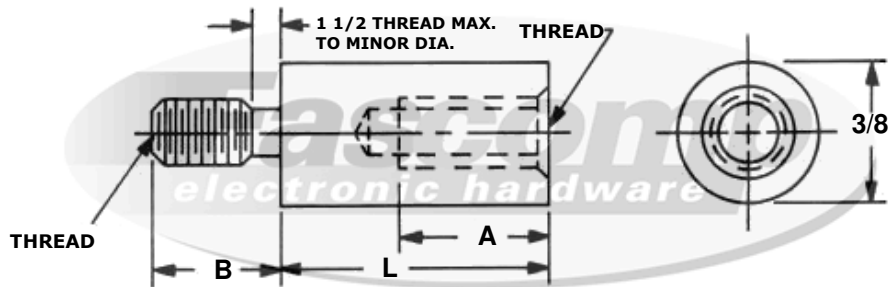

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread			
Short lengths, 'A' tapped to maximum depth			
Thread Code (XXX)	Depth (A)	Length (B)	
440	1/4	3/16	
632	3/8	1/4	
832	7/16	3/8	
1032	1/2	3/8	
1224	1/2	3/8	

Material		
Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	
N	Nylon	

**Tolerances Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**

Compatible Finish		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.