


# 5/16 Round Male-Female Standoff

Hex Length Table	
FCXXXX	Length (L)
FC4071	1/4
FC4072	5/16
FC4073	3/8
FC4074	7/16
FC4075	1/2
FC4076	9/16
FC4077	5/8
FC4078	11/16
FC4079	3/4
FC4080	13/16
FC4081	7/8
FC4082	15/16
FC4083	1
FC4084	1-1/16
FC4085	1-1/8
FC4086	1-3/16
FC4087	1-1/4
FC4088	1-5/16
FC4089	1-3/8
FC4090	1-7/16
FC4091	1-1/2
FC4092	1-9/16
FC4093	1-5/8
FC4094	1-11/16
FC4095	1-3/4
FC4096	1-13/16
FC4097	1-7/8
FC4098	1-15/16
FC4099	2
FC4100	2-1/8
FC4101	2-1/4
FC4102	2-3/8
FC4103	2-1/2
FC4104	2-5/8
FC4105	2-3/4
FC4106	2-7/8
FC4107	3
FC4108	3-1/4
FC4109	3-1/2
FC4110	3-3/4
FC4111	4
FC4112	4-1/4
FC4113	4-1/2
FC4114	4-3/4
FC4115	5
FC4116	5-1/4
FC4117	5-1/2
FC4118	5-3/4
FC4119	6

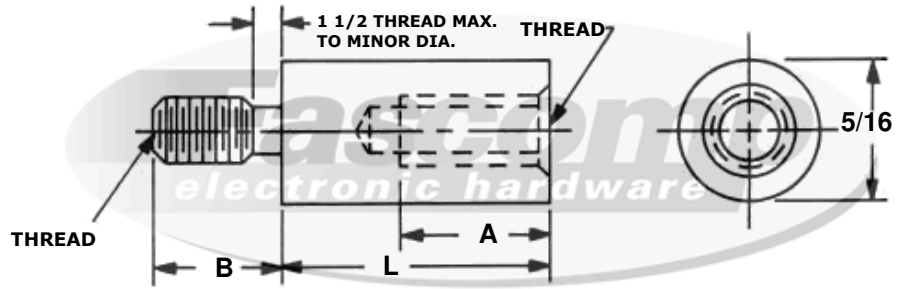

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread			
Short lengths, 'A' tapped to maximum depth			
Thread Code (XXX)	Depth (A)	Length (B)	
440	1/4	3/16	
632	3/8	1/4	
832	7/16	3/8	
1032	1/2	3/8	

Material	
Material Code (XX)	
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel
N	Nylon

**Tolerances Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**

Compatible Finish	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.