


Retainers—Type A

Create a part number:

Length		Material		Finish
FCXXXX-XXX		XX		XX
_____ - _____ - _____				

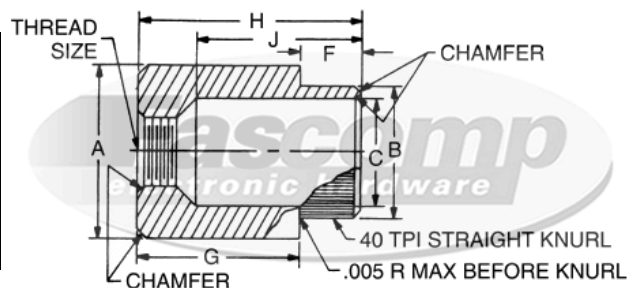

Retainers Type A

FCXXXX-XXX	Thread	Panel Thickness	A +.004 -.004	B +.000 -.003	C +.004 -.001	F +.005 -.005	G +.005 -.005	H +.010 -.010	J +.005 -.005
FC1000-050	4-40	.048 - .072	1/4	.198	.150	.050	.200	1/4	.164
FC1000-080	4-40	.074 - .109	1/4	.198	.150	.080	.170	1/4	.164
FC1000-125	4-40	.119 - .156	1/4	.198	.150	.125	.125	1/4	.164
FC1001-050	6-32	.048 - .072	1/4	.198	.150	.050	.262	5/16	.210
FC1001-080	6-32	.074 - .109	1/4	.198	.150	.080	.232	5/16	.210
FC1001-125	6-32	.119 - .156	1/4	.198	.150	.125	.187	5/16	.210
FC1001-188	6-32	.188 -	1/4	.198	.150	.188	.124	5/16	.210
FC1002-050	8-32	.048 - .072	5/16	.228	.188	.050	.262	5/16	.208
FC1002-080	8-32	.074 - .109	5/16	.228	.188	.080	.232	5/16	.208
FC1002-125	8-32	.119 - .156	5/16	.228	.188	.125	.187	5/16	.208
FC1002-188	8-32	.188 -	5/16	.228	.188	.188	.124	5/16	.208
FC1003-050	10-24	.048 - .072	3/8	.280	.228	.050	.325	3/8	.236
FC1003-080	10-24	.074 - .109	3/8	.280	.228	.080	.295	3/8	.236
FC1003-125	10-24	.119 - .156	3/8	.280	.228	.125	.250	3/8	.236
FC1003-188	10-24	.188 -	3/8	.280	.228	.188	.187	3/8	.236
FC1003-250	10-24	.250 -	3/8	.280	.228	.250	.125	3/8	.236
FC1004-050	10-32	.048 - .072	3/8	.280	.228	.050	.325	3/8	.236
FC1004-080	10-32	.074 - .109	3/8	.280	.228	.080	.295	3/8	.236
FC1004-125	10-32	.119 - .156	3/8	.280	.228	.125	.250	3/8	.236
FC1004-188	10-32	.188 -	3/8	.280	.228	.188	.187	3/8	.236
FC1004-250	10-32	.250 -	3/8	.280	.228	.250	.125	3/8	.236
FC1005-050	1/4-20	.048 - .072	1/2	.366	.295	.050	.387	7/16	.292
FC1005-080	1/4-20	.074 - .109	1/2	.366	.295	.080	.357	7/16	.292
FC1005-125	1/4-20	.119 - .156	1/2	.366	.295	.125	.312	7/16	.292
FC1005-188	1/4-20	.188 -	1/2	.366	.295	.188	.249	7/16	.292
FC1005-250	1/4-20	.250 -	1/2	.366	.295	.250	.187	7/16	.292
FC1006-050	1/4-28	.048 - .072	1/2	.366	.295	.050	.387	7/16	.292
FC1006-080	1/4-28	.074 - .109	1/2	.366	.295	.080	.357	7/16	.292
FC1006-125	1/4-28	.119 - .156	1/2	.366	.295	.125	.312	7/16	.292
FC1006-188	1/4-28	.188 -	1/2	.366	.295	.188	.249	7/16	.292
FC1006-250	1/4-28	.250 -	1/2	.366	.295	.250	.187	7/16	.292
FC1007-050	5/16-18	.048 - .072	5/8	.414	.347	.050	.450	1/2	.358
FC1007-080	5/16-18	.074 - .109	5/8	.414	.347	.080	.420	1/2	.358
FC1007-125	5/16-18	.119 - .156	5/8	.414	.347	.125	.375	1/2	.358
FC1007-188	5/16-18	.188 -	5/8	.414	.347	.188	.312	1/2	.358
FC1007-250	5/16-18	.250 -	5/8	.414	.347	.250	.250	1/2	.358
FC1008-080	3/8-16	.074 - .109	3/4	.479	.406	.080	.482	9/16	.418
FC1008-125	3/8-16	.119 - .156	3/4	.479	.406	.125	.437	9/16	.418
FC1008-188	3/8-16	.188 -	3/4	.479	.406	.188	.374	9/16	.418
FC1008-250	3/8-16	.250 -	3/4	.479	.406	.250	.312	9/16	.418

Material

Material Code (XX)

B	Brass
S	Steel
SS	Stainless Steel

Compatible Finish

B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

Tolerances

Unless otherwise Specified

.xxx +/- .005

.xx +/- .010

Angular +/- 1 Degree

Linear +/- .005

Break all sharp edges

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.

