


Retainers—Type B

Create a part number:

Length	Material	Finish
FCXXX-XXX	XX	XX

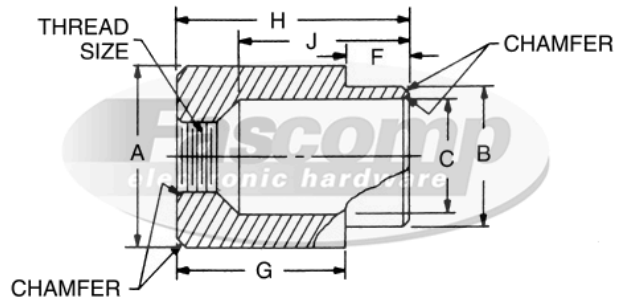

Retainers Type B										
FCXXX-XXX	Thread	Panel Thickness	A +.004 -.004	B +.000 -.003	C +.004 -.001	F +.005 -.005	G +.005 -.005	H +.010 -.010	J +.005 -.005	
FC1009-062	4-40	.052 - .067	9/32	.250	.210	.062	.312	3/8	.263	
FC1009-093	4-40	.084 - .099	9/32	.250	.210	.093	.281	3/8	.263	
FC1009-125	4-40	.109 - .140	9/32	.250	.210	.125	.250	3/8	.263	
FC1009-187	4-40	.171 - .203	9/32	.250	.210	.187	.187	3/8	.263	
FC1010-062	6-32	.052 - .067	9/32	.250	.210	.062	.312	3/8	.265	
FC1010-093	6-32	.084 - .099	9/32	.250	.210	.093	.281	3/8	.265	
FC1010-125	6-32	.109 - .140	9/32	.250	.210	.125	.250	3/8	.265	
FC1010-187	6-32	.171 - .203	9/32	.250	.210	.187	.187	3/8	.265	
FC1010-250	6-32	.234 - .265	9/32	.250	.210	.250	.125	3/8	.265	
FC1011-062	8-32	.052 - .067	17/32	.433	.386	.062	.500	9/16	.388	
FC1011-093	8-32	.084 - .099	17/32	.433	.386	.093	.468	9/16	.388	
FC1011-125	8-32	.109 - .140	17/32	.433	.386	.125	.437	9/16	.388	
FC1011-187	8-32	.171 - .203	17/32	.433	.386	.187	.375	9/16	.388	
FC1011-250	8-32	.234 - .265	17/32	.433	.386	.250	.312	9/16	.388	
FC1012-062	10-24	.052 - .067	17/32	.433	.386	.062	.500	9/16	.395	
FC1012-093	10-24	.084 - .099	17/32	.433	.386	.093	.468	9/16	.395	
FC1012-125	10-24	.109 - .140	17/32	.433	.386	.125	.437	9/16	.395	
FC1012-187	10-24	.171 - .203	17/32	.433	.386	.187	.375	9/16	.395	
FC1012-250	10-24	.234 - .265	17/32	.433	.386	.250	.312	9/16	.395	
FC1013-062	10-32	.052 - .067	17/32	.433	.386	.062	.500	9/16	.395	
FC1013-093	10-32	.084 - .099	17/32	.433	.386	.093	.468	9/16	.395	
FC1013-125	10-32	.109 - .140	17/32	.433	.386	.125	.437	9/16	.395	
FC1013-187	10-32	.171 - .203	17/32	.433	.386	.187	.375	9/16	.395	
FC1013-250	10-32	.234 - .265	17/32	.433	.386	.250	.312	9/16	.395	
FC1014-062	12-24	.052 - .067	17/32	.433	.386	.062	.500	9/16	.396	
FC1014-093	12-24	.084 - .099	17/32	.433	.386	.093	.468	9/16	.396	
FC1014-125	12-24	.109 - .140	17/32	.433	.386	.125	.437	9/16	.396	
FC1014-187	12-24	.171 - .203	17/32	.433	.386	.187	.375	9/16	.396	
FC1014-250	12-24	.234 - .265	17/32	.433	.386	.250	.312	9/16	.396	
FC1015-062	1/4-20	.052 - .067	17/32	.433	.386	.062	.500	9/16	.403	
FC1015-093	1/4-20	.084 - .099	17/32	.433	.386	.093	.468	9/16	.403	
FC1015-125	1/4-20	.109 - .140	17/32	.433	.386	.125	.437	9/16	.403	
FC1015-187	1/4-20	.171 - .203	17/32	.433	.386	.187	.375	9/16	.403	
FC1015-250	1/4-20	.234 - .265	17/32	.433	.386	.250	.312	9/16	.403	
FC1016-062	1/4-28	.052 - .067	17/32	.433	.386	.062	.500	9/16	.403	
FC1016-093	1/4-28	.084 - .099	17/32	.433	.386	.093	.468	9/16	.403	
FC1016-125	1/4-28	.109 - .140	17/32	.433	.386	.125	.437	9/16	.403	
FC1016-187	1/4-28	.171 - .203	17/32	.433	.386	.187	.375	9/16	.403	
FC1016-250	1/4-28	.234 - .265	17/32	.433	.386	.250	.312	9/16	.403	

Material	
Material Code (XX)	
B	Brass
S	Steel
SS	Stainless Steel

Compatible Finish	
B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

Tolerances
Unless otherwise Specified
.xxx +/- .005
.xx +/- .010
Angular +/- 1 Degree
Linear +/- .005
Break all sharp edges

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.

