


Retainers—Type C

Create a part number:

Length		Material		Finish
FCXXX-XXX		XX		XX

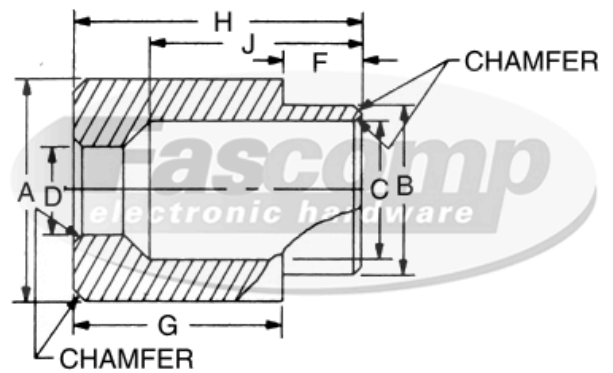

Retainers Type C											
FCXXX-XXX	Thread	Panel Thickness	A +.004 -.004	B +.000 -.003	C +.004 -.001	D +.004 -.001	F +.005 -.005	G +.005 -.005	H +.010 -.010	J +.005 -.005	
FC1017-062	4-40	.052 - .067	9/32	.250	.210	.125	.062	.312	3/8	.299	
FC1017-093	4-40	.084 - .099	9/32	.250	.210	.125	.093	.281	3/8	.299	
FC1017-125	4-40	.109 - .140	9/32	.250	.210	.125	.125	.250	3/8	.299	
FC1017-187	4-40	.171 - .203	9/32	.250	.210	.125	.187	.187	3/8	.299	
FC1018-062	6-32	.052 - .067	9/32	.250	.210	.152	.062	.312	3/8	.304	
FC1018-093	6-32	.084 - .099	9/32	.250	.210	.152	.093	.281	3/8	.304	
FC1018-125	6-32	.109 - .140	9/32	.250	.210	.152	.125	.250	3/8	.304	
FC1018-187	6-32	.171 - .203	9/32	.250	.210	.152	.187	.187	3/8	.304	
FC1019-062	8-32	.052 - .067	17/32	.433	.386	.177	.062	.500	9/16	.447	
FC1019-093	8-32	.084 - .099	17/32	.433	.386	.177	.093	.468	9/16	.447	
FC1019-125	8-32	.109 - .140	17/32	.433	.386	.177	.125	.437	9/16	.447	
FC1019-187	8-32	.171 - .203	17/32	.433	.386	.177	.187	.375	9/16	.447	
FC1019-250	8-32	.234 - .265	17/32	.433	.386	.177	.250	.312	9/16	.447	
FC1020-062	10-24	.052 - .067	17/32	.433	.386	.203	.062	.500	9/16	.464	
FC1020-093	10-24	.084 - .099	17/32	.433	.386	.203	.093	.468	9/16	.464	
FC1020-125	10-24	.109 - .140	17/32	.433	.386	.203	.125	.437	9/16	.464	
FC1020-187	10-24	.171 - .203	17/32	.433	.386	.203	.187	.375	9/16	.464	
FC1020-250	10-24	.234 - .265	17/32	.433	.386	.203	.250	.312	9/16	.464	
FC1021-062	10-32	.052 - .067	17/32	.433	.386	.203	.062	.500	9/16	.464	
FC1021-093	10-32	.084 - .099	17/32	.433	.386	.203	.093	.468	9/16	.464	
FC1021-125	10-32	.109 - .140	17/32	.433	.386	.203	.125	.437	9/16	.464	
FC1021-187	10-32	.171 - .203	17/32	.433	.386	.203	.187	.375	9/16	.464	
FC1021-250	10-32	.234 - .265	17/32	.433	.386	.203	.250	.312	9/16	.464	
FC1022-062	12-24	.052 - .067	17/32	.433	.386	.228	.062	.500	9/16	.459	
FC1022-093	12-24	.084 - .099	17/32	.433	.386	.228	.093	.468	9/16	.459	
FC1022-125	12-24	.109 - .140	17/32	.433	.386	.228	.125	.437	9/16	.459	
FC1022-187	12-24	.171 - .203	17/32	.433	.386	.228	.187	.375	9/16	.459	
FC1022-250	12-24	.234 - .265	17/32	.433	.386	.228	.250	.312	9/16	.459	
FC1023-062	1/4-20	.052 - .067	17/32	.433	.386	.257	.062	.500	9/16	.475	
FC1023-093	1/4-20	.084 - .099	17/32	.433	.386	.257	.093	.468	9/16	.475	
FC1023-125	1/4-20	.109 - .140	17/32	.433	.386	.257	.125	.437	9/16	.475	
FC1023-187	1/4-20	.171 - .203	17/32	.433	.386	.257	.187	.375	9/16	.475	
FC1023-250	1/4-20	.234 - .265	17/32	.433	.386	.257	.250	.312	9/16	.475	
FC1024-062	1/4-28	.052 - .067	17/32	.433	.386	.257	.062	.500	9/16	.475	
FC1024-093	1/4-28	.084 - .099	17/32	.433	.386	.257	.093	.468	9/16	.475	
FC1024-125	1/4-28	.109 - .140	17/32	.433	.386	.257	.125	.437	9/16	.475	
FC1024-187	1/4-28	.171 - .203	17/32	.433	.386	.257	.187	.375	9/16	.475	
FC1024-250	1/4-28	.234 - .265	17/32	.433	.386	.257	.250	.312	9/16	.475	

Material	
Material Code (XX)	
B	Brass
S	Steel
SS	Stainless Steel

Compatible Finish	
B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

Tolerances
Unless otherwise Specified
.xxx +/- .005
.xx +/- .010
Angular +/- 1 Degree
Linear +/- .005
Break all sharp edges

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.

