


# Retainers—Type F

Create a part number:

Length		Material		Finish
FCXXX-XXX		XX		XX

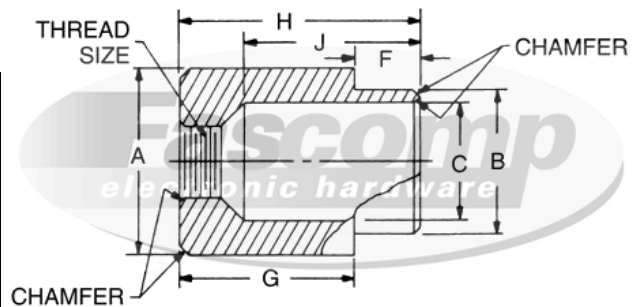

## Retainers Type F

FCXXX-XXX	Thd	Panel Thickness	A	B	C	F	G	H	J
			+0.004 -0.004	+0.002 -0.002	+0.004 -0.001	+0.005 -0.005	+0.005 -0.005	+0.010 -0.010	+0.005 -0.005
FC1041-062	4-40	.052 - .067	1/4	.188	.150	.062	.188	1/4	.161
FC1041-093	4-40	.084 - .099	1/4	.188	.150	.093	.156	1/4	.161
FC1041-125	4-40	.109 - .140	1/4	.188	.150	.125	.125	1/4	.161
FC1042-062	6-32	.052 - .067	1/4	.188	.150	.062	.250	5/16	.210
FC1042-093	6-32	.084 - .099	1/4	.188	.150	.093	.218	5/16	.210
FC1042-125	6-32	.109 - .140	1/4	.188	.150	.125	.187	5/16	.210
FC1042-187	6-32	.171 - .203	1/4	.188	.150	.187	.125	5/16	.210
FC1043-062	8-32	.052 - .067	3/8	.218	.188	.062	.250	5/16	.210
FC1043-093	8-32	.084 - .099	3/8	.218	.188	.093	.218	5/16	.210
FC1043-125	8-32	.109 - .140	3/8	.218	.188	.125	.187	5/16	.210
FC1043-187	8-32	.171 - .203	3/8	.218	.188	.187	.125	5/16	.210
FC1044-062	10-24	.052 - .067	3/8	.270	.228	.062	.312	3/8	.236
FC1044-093	10-24	.084 - .099	3/8	.270	.228	.093	.281	3/8	.236
FC1044-125	10-24	.109 - .140	3/8	.270	.228	.125	.250	3/8	.236
FC1044-187	10-24	.171 - .203	3/8	.270	.228	.187	.188	3/8	.236
FC1044-250	10-24	.234 - .265	3/8	.270	.228	.250	.125	3/8	.236
FC1045-062	10-32	.052 - .067	3/8	.270	.228	.062	.312	3/8	.236
FC1045-093	10-32	.084 - .099	3/8	.270	.228	.093	.281	3/8	.236
FC1045-125	10-32	.109 - .140	3/8	.270	.228	.125	.250	3/8	.236
FC1045-187	10-32	.171 - .203	3/8	.270	.228	.187	.188	3/8	.236
FC1045-250	10-32	.234 - .265	3/8	.270	.228	.250	.125	3/8	.236
FC1046-062	12-24	.052 - .067	3/8	.270	.228	.062	.312	3/8	.239
FC1046-093	12-24	.084 - .099	3/8	.270	.228	.093	.281	3/8	.239
FC1046-125	12-24	.109 - .140	3/8	.270	.228	.125	.250	3/8	.239
FC1046-187	12-24	.171 - .203	3/8	.270	.228	.187	.188	3/8	.239
FC1046-250	12-24	.234 - .265	3/8	.270	.228	.250	.125	3/8	.239
FC1047-062	1/4-20	.052 - .067	1/2	.356	.295	.062	.375	7/16	.295
FC1047-093	1/4-20	.084 - .099	1/2	.356	.295	.093	.343	7/16	.295
FC1047-125	1/4-20	.109 - .140	1/2	.356	.295	.125	.312	7/16	.295
FC1047-187	1/4-20	.171 - .203	1/2	.356	.295	.187	.250	7/16	.295
FC1047-250	1/4-20	.234 - .265	1/2	.356	.295	.250	.187	7/16	.295
FC1048-062	1/4-28	.052 - .067	1/2	.356	.295	.062	.375	7/16	.295
FC1048-093	1/4-28	.084 - .099	1/2	.356	.295	.093	.343	7/16	.295
FC1048-125	1/4-28	.109 - .140	1/2	.356	.295	.125	.312	7/16	.295
FC1048-187	1/4-28	.171 - .203	1/2	.356	.295	.187	.250	7/16	.295
FC1048-250	1/4-28	.234 - .265	1/2	.356	.295	.250	.187	7/16	.295
FC1049-062	5/16-24	.052 - .067	1/2	.404	.343	.062	.375	7/16	.297
FC1049-093	5/16-24	.084 - .099	1/2	.404	.343	.093	.343	7/16	.297
FC1049-125	5/16-24	.109 - .140	1/2	.404	.343	.125	.312	7/16	.297
FC1049-187	5/16-24	.171 - .203	1/2	.404	.343	.187	.250	7/16	.297
FC1049-250	5/16-24	.234 - .265	1/2	.404	.343	.250	.187	7/16	.297

Material	
Material Code (XX)	
B	Brass
S	Steel
SS	Stainless Steel

Compatible Finish	
B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

Source Control Drawing:  
To be produced by  
Fascomp Electronic Hardware

**Tolerances Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.

