




1/4 Hex Spacers

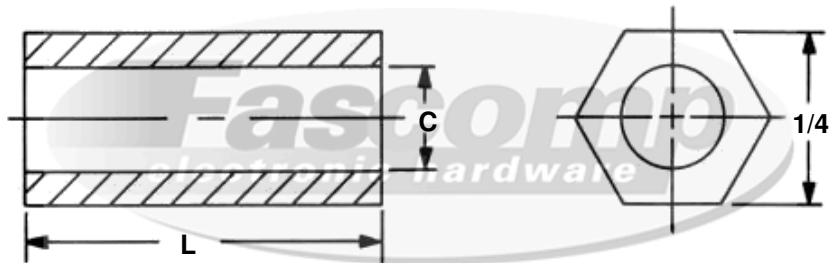

Hex Code Table

✓	FMXXXX	Length (L)
	FC1330	1/8
	FC1331	3/16
	FC1332	1/4
	FC1333	5/16
	FC1334	3/8
	FC1335	7/16
	FC1336	1/2
	FC1337	9/16
	FC1338	5/8
	FC1339	11/16
	FC1340	3/4
	FC1341	13/16
	FC1342	7/8
	FC1343	15/16
	FC1344	1
	FC1345	1-1/16
	FC1346	1-1/8
	FC1347	1-3/16
	FC1348	1-1/4
	FC1349	1-5/16
	FC1350	1-3/8
	FC1351	1-7/16
	FC1352	1-1/2
	FC1353	1-9/16
	FC1354	1-5/8
	FC1355	1-11/16
	FC1356	1-3/4
	FC1357	1-13/16
	FC1358	1-7/8
	FC1359	1-15/16
	FC1360	2

Create a part number:

Length	Clearance	Material	Finish
FCXXXX	XX	XX	XX
_____	_____	_____	_____

Hole Clearance Code (XX)

✓	Code (XX)	C + .010
	2	.090
	4	.115
	6	.140
	8	.166

Material

✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel
	N	Nylon

Compatible Finish (XX)

✓	Compatible Finish (XX)	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



**Tolerances
Unless otherwise Specified**
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.