




3/4 Hex Spacers

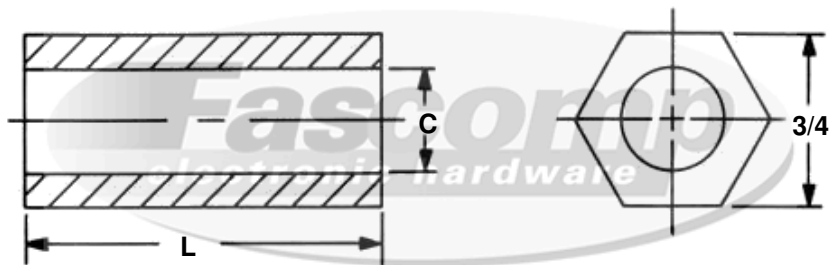

Hex Code Table

✓	FMXXXX	Length (L)
	FC1485	1/8
	FC1486	3/16
	FC1487	1/4
	FC1488	5/16
	FC1489	3/8
	FC1490	7/16
	FC1491	1/2
	FC1492	9/16
	FC1493	5/8
	FC1494	11/16
	FC1495	3/4
	FC1496	13/16
	FC1497	7/8
	FC1498	15/16
	FC1499	1
	FC1500	1-1/16
	FC1501	1-1/8
	FC1502	1-3/16
	FC1503	1-1/4
	FC1504	1-5/16
	FC1505	1-3/8
	FC1506	1-7/16
	FC1507	1-1/2
	FC1508	1-9/16
	FC1509	1-5/8
	FC1510	1-11/16
	FC1511	1-3/4
	FC1512	1-13/16
	FC1513	1-7/8
	FC1514	1-15/16
	FC1515	2

Create a part number:

Length	Clearance	Material	Finish
FCXXXX	XX	XX	XX

Hole Clearance Code (XX)

✓	Code (XX)	C + .010
	6	.140
	8	.166
	10	.192
	12	.218
	25	.252
	31	.315
	38	.380
	43	.440
	50	.505

Material

✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel
	N	Nylon

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

Compatible Finish (XX)

✓	Compatible Finish (XX)	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware