




5/16 Hex Spacers

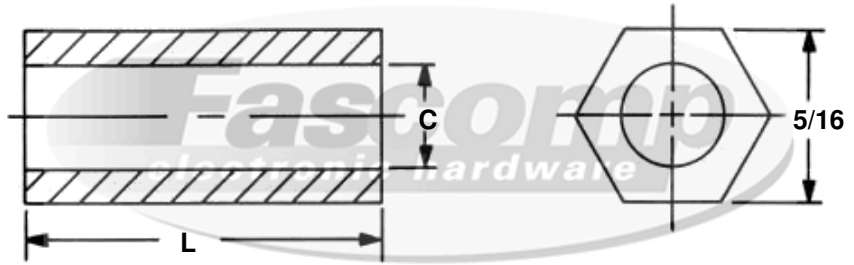

Hex Code Table		
✓	FMXXXX	Length (L)
	FC1361	1/8
	FC1362	3/16
	FC1363	1/4
	FC1364	5/16
	FC1365	3/8
	FC1366	7/16
	FC1367	1/2
	FC1368	9/16
	FC1369	5/8
	FC1370	11/16
	FC1371	3/4
	FC1372	13/16
	FC1373	7/8
	FC1374	15/16
	FC1375	1
	FC1376	1-1/16
	FC1377	1-1/8
	FC1378	1-3/16
	FC1379	1-1/4
	FC1380	1-5/16
	FC1381	1-3/8
	FC1382	1-7/16
	FC1383	1-1/2
	FC1384	1-9/16
	FC1385	1-5/8
	FC1386	1-11/16
	FC1387	1-3/4
	FC1388	1-13/16
	FC1389	1-7/8
	FC1390	1-15/16
	FC1391	2

Create a part number:

Length	Clearance	Material	Finish
FCXXXX	XX	XX	XX
_____ - _____ - _____ - _____			

Hole Clearance Code (XX)		
✓	Code (XX)	C + .010
	4	.115
	6	.140
	8	.166
	10	.192

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel
	N	Nylon

Compatible Finish (XX)		
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.