


Hex Code Table		
✓ FCXXXX	Length (L)	
FC2729	1/8	
FC2730	3/16	
FC2731	1/4	
FC2732	5/16	
FC2733	3/8	
FC2734	7/16	
FC2735	1/2	
FC2736	9/16	
FC2737	5/8	
FC2738	11/16	
FC2739	3/4	
FC2740	13/16	
FC2741	7/8	
FC2742	15/16	
FC2743	1	
FC2744	1-1/16	
FC2745	1-1/8	
FC2746	1-3/16	
FC2747	1-1/4	
FC2748	1-5/16	
FC2749	1-3/8	
FC2750	1-7/16	
FC2751	1-1/2	
FC2752	1-9/16	
FC2753	1-5/8	
FC2754	1-11/16	
FC2755	1-3/4	
FC2756	1-13/16	
FC2757	1-7/8	
FC2758	1-15/16	
FC2759	2	
FC2760	2-1/8	
FC2761	2-1/4	
FC2762	2-3/8	
FC2763	2-1/2	
FC2764	2-5/8	
FC2765	2-3/4	
FC2766	2-7/8	
FC2767	3	
FC2768	3-1/4	
FC2769	3-1/2	
FC2770	3-3/4	
FC2771	4	
FC2772	4-1/4	
FC2773	4-1/2	
FC2774	4-3/4	
FC2775	5	
FC2776	5-1/4	
FC2777	5-1/2	
FC2778	5-3/4	
FC2779	6	

1/2 Square Female Standoff

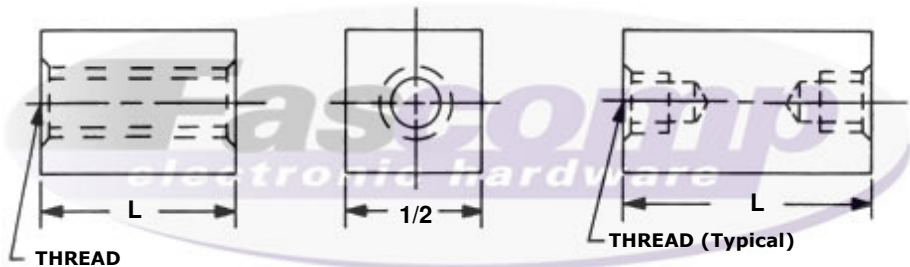

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
632	1	1	3/8	
832	1	1	7/16	
1032	1-1/8	1	1/2	
1224	1-1/8	1	1/2	
2520	1-1/4	1-1/4	5/8	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓ Material Code (XX)	
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel
N	Nylon

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓ Compatible Finish (XX)	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.