


Hex Code Table		
✓ FCXXXX	Length (L)	
FC2528	1/8	
FC2529	3/16	
FC2530	1/4	
FC2531	5/16	
FC2532	3/8	
FC2533	7/16	
FC2534	1/2	
FC2535	9/16	
FC2536	5/8	
FC2537	11/16	
FC2538	3/4	
FC2539	13/16	
FC2540	7/8	
FC2541	15/16	
FC2542	1	
FC2543	1-1/16	
FC2544	1-1/8	
FC2545	1-3/16	
FC2546	1-1/4	
FC2547	1-5/16	
FC2548	1-3/8	
FC2549	1-7/16	
FC2550	1-1/2	
FC2551	1-9/16	
FC2552	1-5/8	
FC2553	1-11/16	
FC2554	1-3/4	
FC2555	1-13/16	
FC2556	1-7/8	
FC2557	1-15/16	
FC2558	2	
FC2559	2-1/8	
FC2560	2-1/4	
FC2561	2-3/8	
FC2562	2-1/2	
FC2563	2-5/8	
FC2564	2-3/4	
FC2565	2-7/8	
FC2566	3	
FC2567	3-1/4	
FC2568	3-1/2	
FC2569	3-3/4	
FC2570	4	
FC2571	4-1/4	
FC2572	4-1/2	
FC2573	4-3/4	
FC2574	5	
FC2575	5-1/4	
FC2576	5-1/2	
FC2577	5-3/4	
FC2578	6	

# 1/4 Square Female Standoff

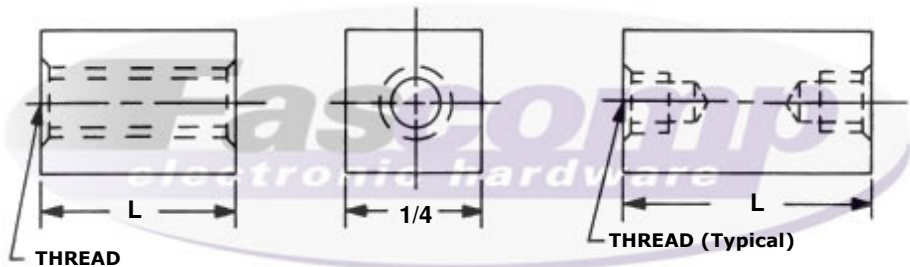

**Create a part number:**

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____ - _____ - _____ - _____			

Thread				
✓ Thread Code (XXX)	Tapped Thru		Longer Parts	
	A, B, S	SS	Blind Tap Depth	
440	1	3/4	1/4	
632	1	1	3/8	
832	1	1	7/16	
1032	1-1/8	1	1/2	

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material	
✓ Material Code (XX)	
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel
N	Nylon

**Tolerances Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**

✓ Compatible Finish (XX)	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.