


## Hex Code Table

| ✓ | FCXXXX | Length (L) |
|---|--------|------------|
|   | FC2481 | 1/8        |
|   | FC2482 | 3/16       |
|   | FC2483 | 1/4        |
|   | FC2484 | 5/16       |
|   | FC2485 | 3/8        |
|   | FC2486 | 7/16       |
|   | FC2487 | 1/2        |
|   | FC2488 | 9/16       |
|   | FC2489 | 5/8        |
|   | FC2490 | 11/16      |
|   | FC2491 | 3/4        |
|   | FC2492 | 13/16      |
|   | FC2493 | 7/8        |
|   | FC2494 | 15/16      |
|   | FC2495 | 1          |
|   | FC2496 | 1-1/16     |
|   | FC2497 | 1-1/8      |
|   | FC2498 | 1-3/16     |
|   | FC2499 | 1-1/4      |
|   | FC2500 | 1-5/16     |
|   | FC2501 | 1-3/8      |
|   | FC2502 | 1-7/16     |
|   | FC2503 | 1-1/2      |
|   | FC2504 | 1-9/16     |
|   | FC2505 | 1-5/8      |
|   | FC2506 | 1-11/16    |
|   | FC2507 | 1-3/4      |
|   | FC2508 | 1-13/16    |
|   | FC2509 | 1-7/8      |
|   | FC2510 | 1-15/16    |
|   | FC2511 | 2          |
|   | FC2512 | 2-1/16     |
|   | FC2513 | 2-1/8      |
|   | FC2514 | 2-3/16     |
|   | FC2515 | 2-1/4      |
|   | FC2516 | 2-5/16     |
|   | FC2517 | 2-3/8      |
|   | FC2518 | 2-7/16     |
|   | FC2519 | 2-1/2      |
|   | FC2520 | 2-9/16     |
|   | FC2521 | 2-5/8      |
|   | FC2522 | 2-11/16    |
|   | FC2523 | 2-3/4      |
|   | FC2524 | 2-13/16    |
|   | FC2525 | 2-7/8      |
|   | FC2526 | 2-15/16    |
|   | FC2527 | 3          |

## 3/16 Square Female Standoff

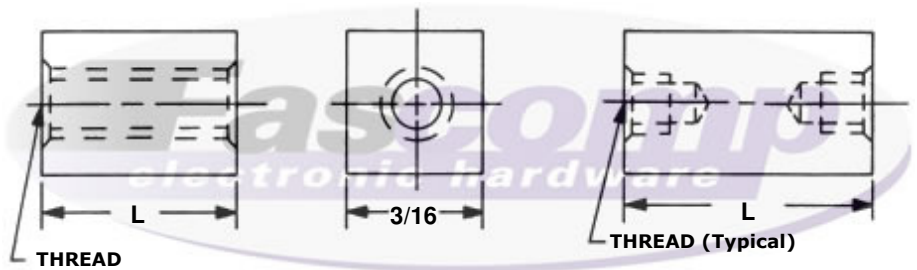

## Create a part number:

| Length                        | Thread | Material | Finish |
|-------------------------------|--------|----------|--------|
| FCXXXX                        | XXX    | XX       | XX     |
| _____ - _____ - _____ - _____ |        |          |        |

| Thread              |             |     |                 |
|---------------------|-------------|-----|-----------------|
| ✓ Thread Code (XXX) | Tapped Thru |     | Longer Parts    |
|                     | A, B, S     | SS  | Blind Tap Depth |
| 256                 | 3/4         | 5/8 | 3/16            |
| 440                 | 1           | 3/4 | 1/4             |

| Material             |                 |
|----------------------|-----------------|
| ✓ Material Code (XX) |                 |
| A                    | Aluminum        |
| B                    | Brass           |
| S                    | Steel           |
| SS                   | Stainless Steel |
| N                    | Nylon           |

**Tolerances Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.

| ✓ Compatible Finish (XX) |  |
|--------------------------|--|
| A, B, S, SS              | 0 - Plain  |
| B, S                     | 5 - Nickel Plate (QQ-N-290)  |
| A                        | 6 - Iridite #14 Gold (MIL-C-5541E)                                       |
| A                        | 7 - Iridite Clear (MIL-C-5541E)  |
| A                        | 9 - Alodine 1200   |
| B, S                     | 12 - Zinc Clear (ASTM-B-633)   |
| B, S                     | 16 - Electro Tin (MIL-T-10727 TYPE 1)                                    |
| SS                       | 20 - Passivation (MIL-F-14072D)  |
| A                        | 22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear) |
| A                        | 24 - Black Anodize (MIL-A-8625)  |
| B, S, SS                 | 26 - Black Oxide   |
| B, S                     | 28 - Zinc Yellow (ASTM-B-633)  |



Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware