


Hex Code Table		
✓	FCXXXX	Length (L)
	FC2595	1/8
	FC2596	3/16
	FC2597	1/4
	FC2598	5/16
	FC2599	3/8
	FC2600	7/16
	FC2601	1/2
	FC2602	9/16
	FC2603	5/8
	FC2604	11/16
	FC2605	3/4
	FC2606	13/16
	FC2607	7/8
	FC2608	15/16
	FC2609	1
	FC2610	1-1/16
	FC2611	1-1/8
	FC2612	1-3/16
	FC2613	1-1/4
	FC2614	1-5/16
	FC2615	1-3/8
	FC2616	1-7/16
	FC2617	1-1/2
	FC2618	1-9/16
	FC2619	1-5/8
	FC2620	1-11/16
	FC2621	1-3/4
	FC2622	1-13/16
	FC2623	1-7/8
	FC2624	1-15/16
	FC2625	2
	FC2626	2-1/8
	FC2627	2-1/4
	FC2628	2-3/8
	FC2629	2-1/2
	FC2630	2-5/8
	FC2631	2-3/4
	FC2632	2-7/8
	FC2633	3
	FC2634	3-1/4
	FC2635	3-1/2
	FC2636	3-3/4
	FC2637	4
	FC2638	4-1/4
	FC2639	4-1/2
	FC2640	4-3/4
	FC2641	5
	FC2642	5-1/4
	FC2643	5-1/2
	FC2644	5-3/4
	FC2645	6

5/16 Square Female Standoff

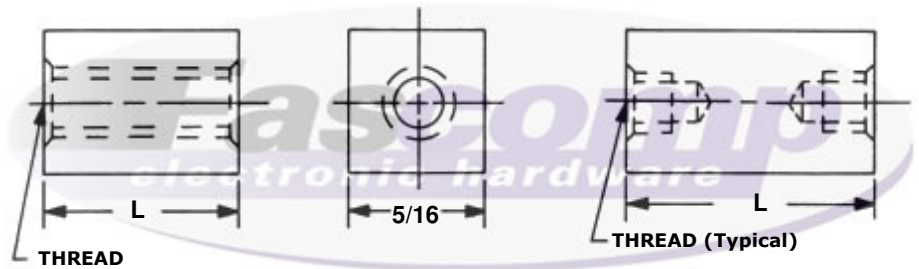

Create a part number:

Length	Thread	Material	Finish
FCXXXX	XXX	XX	XX
_____	_____	_____	_____

Thread				
✓	Thread Code (XXX)	Tapped Thru		Longer Parts Blind Tap Depth
		A, B, S	SS	
	440	1	3/4	1/4
	632	1	1	3/8
	832	1	1	7/16
	1032	1-1/8	1	1/2

Aluminum (A), Brass (B), Steel (S), Stainless Steel (SS)

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel
	N	Nylon

Tolerances Unless otherwise Specified

.xxx +/- .005
.xx +/- .010
Angular +/- 1 Degree
Linear +/- .005
Break all sharp edges

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.

✓	Compatible Finish (XX)	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
To be produced by
Fascomp Electronic Hardware