


# 1/8 Hex Swage Standoff

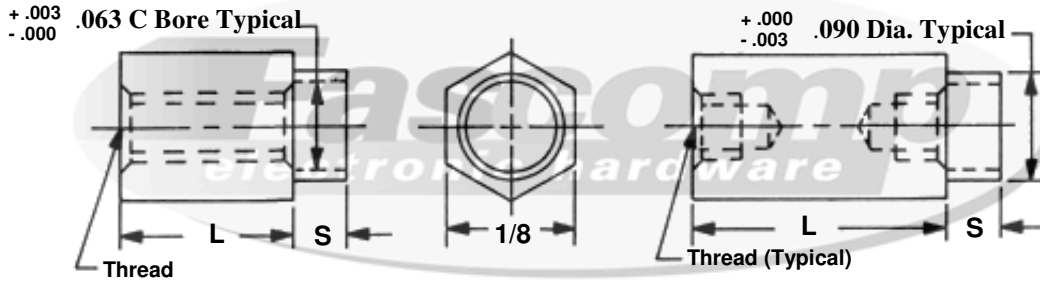

## Create a part number:

Length	Panel/Code	Thread	Material	Finish
FCXXXX	X	XXX	XX	XX

Length Table	
FCXXXX	Length (L)
FC3500	1/8
FC3501	3/16
FC3502	1/4
FC3503	5/16
FC3504	3/8
FC3505	7/16
FC3506	1/2
FC3507	9/16
FC3508	5/8
FC3509	11/16
FC3510	3/4
FC3511	13/16
FC3512	7/8
FC3513	15/16
FC3514	1

Swage Panel/Code (X)			
S	+ .003 - .003	P	
A	.075	1/32	
B	.105	1/16	
C	.135	3/32	
D	.165	1/8	
E	.230	3/16	
F	.290	1/4	

Thread	
Thread Code (XXX)	Thread
080	0-80

Material	
Material Code (XX)	
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel

**Tolerances Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**

Compatible Finish (XX)	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.



Source Control Drawing:  
 To be produced by  
 Fascomp Electronic Hardware