


3/16 Hex Swage Standoff

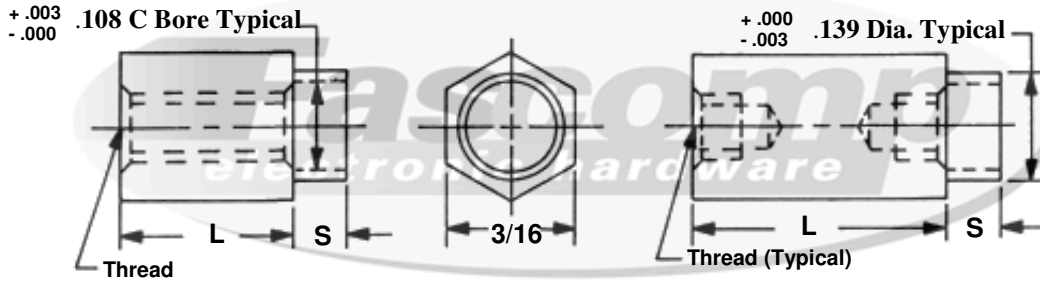

Create a part number:

Length	Panel/Code	Thread	Material	Finish
FCXXXX	X	XXX	XX	XX
<div style="border-top: 1px dashed black; margin-top: 5px;"></div>				

Length Table	
<input checked="" type="checkbox"/> FCXXXX	Length (L)
FC3530	1/8
FC3531	3/16
FC3532	1/4
FC3533	5/16
FC3534	3/8
FC3535	7/16
FC3536	1/2
FC3537	9/16
FC3538	5/8
FC3539	11/16
FC3540	3/4
FC3541	13/16
FC3542	7/8
FC3543	15/16
FC3544	1

Swage Panel/Code (X)			
<input checked="" type="checkbox"/>	S	+ .003 - .003	P
	A	.075	1/32
	B	.105	1/16
	C	.135	3/32
	D	.165	1/8
	E	.230	3/16
	F	.290	1/4

Thread		
<input checked="" type="checkbox"/>	Thread Code (XXX)	Thread
	256	2-56
	348	3-48

Material	
<input checked="" type="checkbox"/>	Material Code (XX)
	A Aluminum
	B Brass
	S Steel
	SS Stainless Steel

**Tolerances
Unless otherwise Specified**
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

<input checked="" type="checkbox"/>	Compatible Finish (XX)	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.



Source Control Drawing:
To be produced by
Fascomp Electronic Hardware