


3/8 Hex Swage Standoff

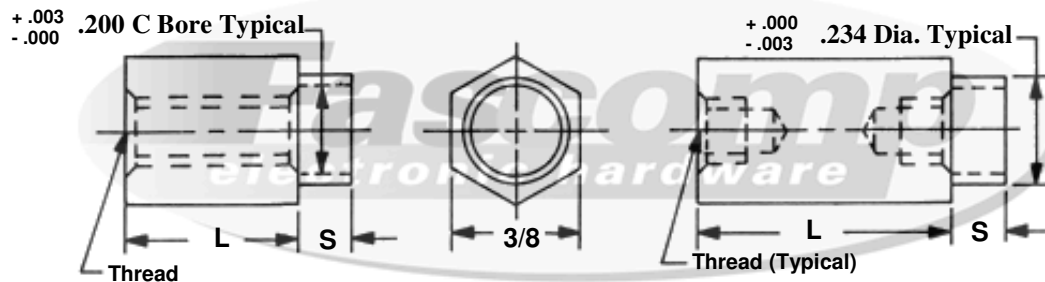

Create a part number:

Length Table	
FCXXXX	Length (L)
FC3607	1/8
FC3608	3/16
FC3609	1/4
FC3610	5/16
FC3611	3/8
FC3612	7/16
FC3613	1/2
FC3614	9/16
FC3615	5/8
FC3616	11/16
FC3617	3/4
FC3618	13/16
FC3619	7/8
FC3620	15/16
FC3621	1
FC3622	1-1/16
FC3623	1-1/8
FC3624	1-3/16
FC3625	1-1/4
FC3626	1-5/16
FC3627	1-3/8
FC3628	1-7/16
FC3629	1-1/2
FC3630	1-9/16
FC3631	1-5/8
FC3632	1-11/16
FC3633	1-3/4
FC3634	1-13/16
FC3635	1-7/8
FC3636	1-15/16
FC3637	2

Length	Panel/Code	Thread	Material	Finish
FCXXXX	X	XXX	XX	XX
_____ - _____ - _____ - _____ - _____				

Swage Panel/Code (X)			
S	+ .003 - .003	P	
A	.075	1/32	
B	.105	1/16	
C	.135	3/32	
D	.165	1/8	
E	.230	3/16	
F	.290	1/4	

Thread		
Thread Code (XXX)	Thread	
440	4-40	
632	6-32	
832	8-32	
1032	10-32	

Material	
Material Code (XX)	
A	Aluminum
B	Brass
S	Steel
SS	Stainless Steel

Compatible Finish (XX)	
A, B, S, SS	0 - Plain
B, S	5 - Nickel Plate (QQ-N-290)
A	6 - Iridite #14 Gold (MIL-C-5541E)
A	7 - Iridite Clear (MIL-C-5541E)
A	9 - Alodine 1200
B, S	12 - Zinc Clear (ASTM-B-633)
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
SS	20 - Passivation (MIL-F-14072D)
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
A	24 - Black Anodize (MIL-A-8625)
B, S, SS	26 - Black Oxide
B, S	28 - Zinc Yellow (ASTM-B-633)



Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

**Tolerances
Unless otherwise Specified**
.xxx +/- .005
.xx +/- .010
Angular +/- 1 Degree
Linear +/- .005
Break all sharp edges

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.