


5/32 Hex Swage Standoff

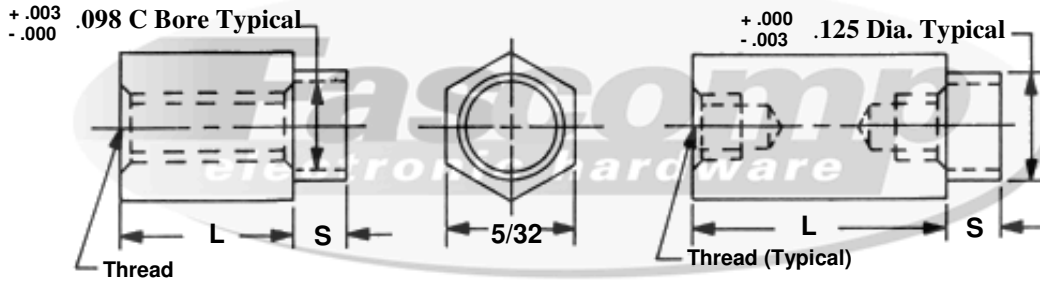

Create a part number:

| Length | Panel/Code | Thread | Material | Finish |
|--------|------------|--------|----------|--------|
| FCXXXX | X | XXX | XX | XX |
| _____ | | | | |

| Length Table | |
|--------------|------------|
| FCXXXX | Length (L) |
| FC3515 | 1/8 |
| FC3516 | 3/16 |
| FC3517 | 1/4 |
| FC3518 | 5/16 |
| FC3519 | 3/8 |
| FC3520 | 7/16 |
| FC3521 | 1/2 |
| FC3522 | 9/16 |
| FC3523 | 5/8 |
| FC3524 | 11/16 |
| FC3525 | 3/4 |
| FC3526 | 13/16 |
| FC3527 | 7/8 |
| FC3528 | 15/16 |
| FC3529 | 1 |

| Swage Panel/Code (X) | | | |
|----------------------|------------------|------|--|
| S | + .003 - .003 | P | |
| A | .075 | 1/32 | |
| B | .105 | 1/16 | |
| C | .135 | 3/32 | |
| D | .165 | 1/8 | |
| E | .230 | 3/16 | |
| F | .290 | 1/4 | |

| Thread | |
|-------------------|--------|
| Thread Code (XXX) | Thread |
| 080 | 0-80 |
| 256 | 2-56 |

| Material | |
|--------------------|-----------------|
| Material Code (XX) | |
| A | Aluminum |
| B | Brass |
| S | Steel |
| SS | Stainless Steel |

Tolerances
Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

| Compatible Finish (XX) | |
|------------------------|---|
| A, B, S, SS | 0 - Plain |
| B, S | 5 - Nickel Plate (QQ-N-290) |
| A | 6 - Iridite #14 Gold (MIL-C-5541E) |
| A | 7 - Iridite Clear (MIL-C-5541E) |
| A | 9 - Alodine 1200 |
| B, S | 12 - Zinc Clear (ASTM-B-633) |
| B, S | 16 - Electro Tin (MIL-T-10727 TYPE 1) |
| SS | 20 - Passivation (MIL-F-14072D) |
| A | 22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear) |
| A | 24 - Black Anodize (MIL-A-8625) |
| B, S, SS | 26 - Black Oxide |
| B, S | 28 - Zinc Yellow (ASTM-B-633) |

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware