


1/8 Round Swage Standoff

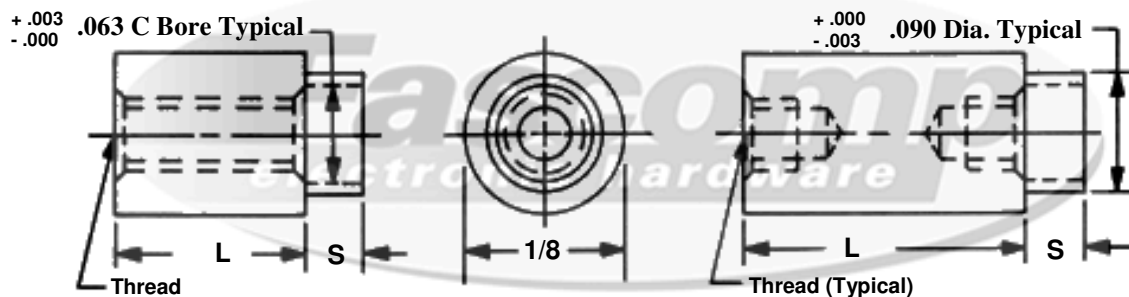

Create a part number:

Length	Panel/Code	Thread	Material	Finish
FCXXXX	X	XXX	XX	XX
_____ - _____ - _____ - _____ - _____				

Length Table		
✓ FCXXXX	Length (L)	
FC3000	1/8	
FC3001	3/16	
FC3002	1/4	
FC3003	5/16	
FC3004	3/8	
FC3005	7/16	
FC3006	1/2	
FC3007	9/16	
FC3008	5/8	
FC3009	11/16	
FC3010	3/4	
FC3011	13/16	
FC3012	7/8	
FC3013	15/16	
FC3014	1	

Swage Panel/Code (X)			
✓	S	+ .003 - .003	P
	A	.075	1/32
	B	.105	1/16
	C	.135	3/32
	D	.165	1/8
	E	.230	3/16
	F	.290	1/4

Thread		
	Thread Code (XXX)	Thread
✓	080	0-80

Material		
✓	Material Code (XX)	
	A	Aluminum
	B	Brass
	S	Steel
	SS	Stainless Steel

Tolerances Unless otherwise Specified
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

✓	Compatible Finish (XX)	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.



Source Control Drawing:
 To be produced by
 Fascomp Electronic Hardware