


3/8 Round Swage Standoff

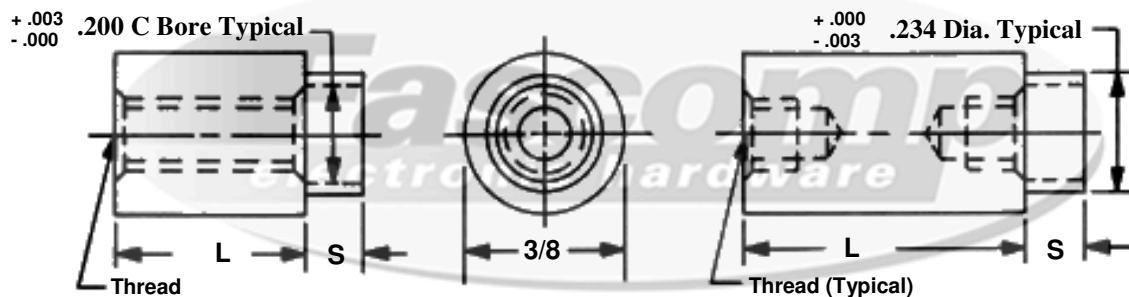

Create a part number:

Length Table		
✓ FCXXXX	Length (L)	
FC3107	1/8	
FC3108	3/16	
FC3109	1/4	
FC3110	5/16	
FC3111	3/8	
FC3112	7/16	
FC3113	1/2	
FC3114	9/16	
FC3115	5/8	
FC3116	11/16	
FC3117	3/4	
FC3118	13/16	
FC3119	7/8	
FC3120	15/16	
FC3121	1	
FC3122	1-1/16	
FC3123	1-1/8	
FC3124	1-3/16	
FC3125	1-1/4	
FC3126	1-5/16	
FC3127	1-3/8	
FC3128	1-7/16	
FC3129	1-1/2	
FC3130	1-9/16	
FC3131	1-5/8	
FC3132	1-11/16	
FC3133	1-3/4	
FC3134	1-13/16	
FC3135	1-7/8	
FC3136	1-15/16	
FC3137	2	

Length	Panel/Code	Thread	Material	Finish
FCXXXX	X	XXX	XX	XX

Swage Panel/Code (X)			
✓ S	+ .003 - .003	P	
A	.075	1/32	
B	.105	1/16	
C	.135	3/32	
D	.165	1/8	
E	.230	3/16	
F	.290	1/4	

Thread		
✓ Thread Code (XXX)	Thread	
440	4-40	
632	6-32	
832	8-32	
1032	10-32	

Material		
✓ Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	

✓ Compatible Finish (XX)		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

**Tolerances
Unless otherwise Specified**
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.