


5/16 Round Swage Standoff

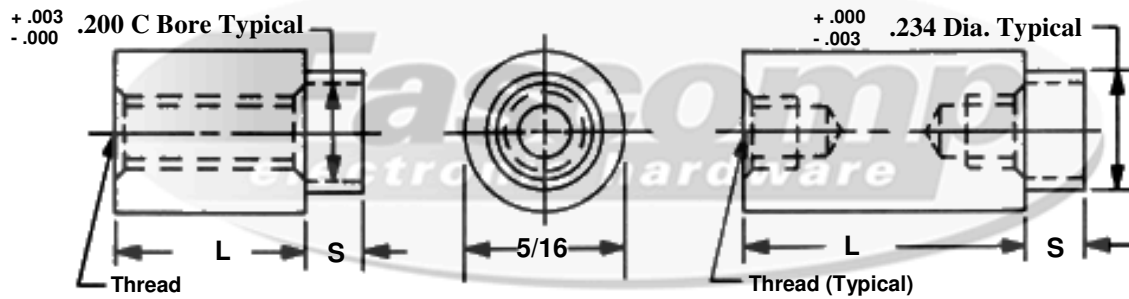

Create a part number:

Length Table	
FCXXX	Length (L)
FC3076	1/8
FC3077	3/16
FC3078	1/4
FC3079	5/16
FC3080	3/8
FC3081	7/16
FC3082	1/2
FC3083	9/16
FC3084	5/8
FC3085	11/16
FC3086	3/4
FC3087	13/16
FC3088	7/8
FC3089	15/16
FC3090	1
FC3091	1-1/16
FC3092	1-1/8
FC3093	1-3/16
FC3094	1-1/4
FC3095	1-5/16
FC3096	1-3/8
FC3097	1-7/16
FC3098	1-1/2
FC3099	1-9/16
FC3100	1-5/8
FC3101	1-11/16
FC3102	1-3/4
FC3103	1-13/16
FC3104	1-7/8
FC3105	1-15/16
FC3106	2

Length	Panel/Code	Thread	Material	Finish
FCXXX	X	XXX	XX	XX
_____ - _____ - _____ - _____ - _____				

Swage Panel/Code (X)			
S	+ .003 - .003	P	
A	.075	1/32	
B	.105	1/16	
C	.135	3/32	
D	.165	1/8	
E	.230	3/16	
F	.290	1/4	

Thread		
Thread Code (XXX)	Thread	
440	4-40	
632	6-32	
832	8-32	
1032	10-32	

Material		
Material Code (XX)		
A	Aluminum	
B	Brass	
S	Steel	
SS	Stainless Steel	

Compatible Finish (XX)		
A, B, S, SS	0 - Plain	
B, S	5 - Nickel Plate (QQ-N-290)	
A	6 - Iridite #14 Gold (MIL-C-5541E)	
A	7 - Iridite Clear (MIL-C-5541E)	
A	9 - Alodine 1200	
B, S	12 - Zinc Clear (ASTM-B-633)	
B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)	
SS	20 - Passivation (MIL-F-14072D)	
A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)	
A	24 - Black Anodize (MIL-A-8625)	
B, S, SS	26 - Black Oxide	
B, S	28 - Zinc Yellow (ASTM-B-633)	



Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

**Tolerances
Unless otherwise Specified**
 .xxx +/- .005
 .xx +/- .010
 Angular +/- 1 Degree
 Linear +/- .005
Break all sharp edges

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.