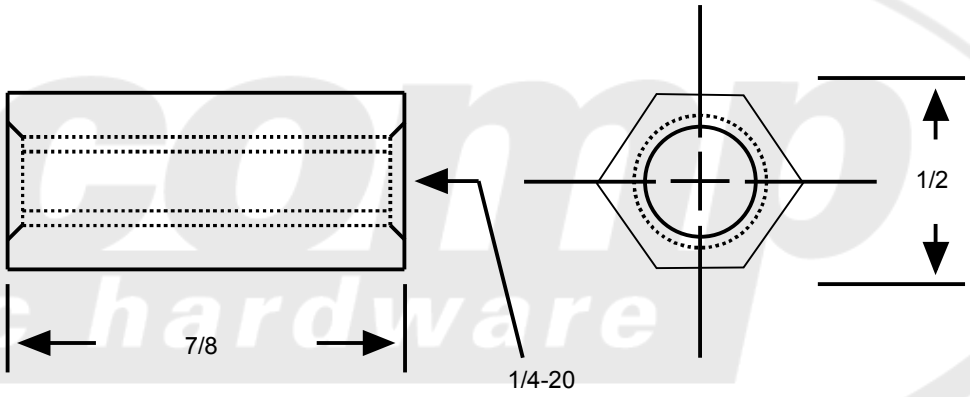
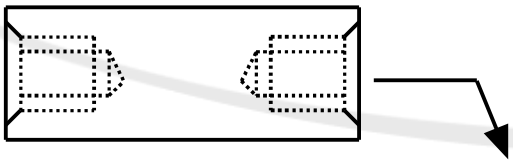


For Tap Thru and Blind Tap information see chart

| Tapped Thru up to and including these lengths | | | Longer Lengths |
|---|---|---|---|
| **Thread** | **Aluminum, Brass, Steel & Nylon** | **Stainless Steel** | **Tap Each End** |
| **0-80** | .375 | .250 | .187 |
| **2-56** | .750 | .625 | .187 |
| **4-40** | 1.00 | .750 | .250 |
| **6-32** | 1.00 | 1.00 | .375 |
| **8-32** | 1.00 | 1.00 | .437 |
| **10-32** | 1.125 | 1.00 | .500 |
| **12-24** | 1.125 | 1.00 | .500 |
| **25-20** | 1.250 | 1.250 | .625 |

All base materials are RoHS compliant

| | |
|---|---|
| Drawing not to scale | Title: Hex Female Standoff |
| Break all sharp edges on outside diameters | Part Number: FC2311-2520-SS |
| All base materials are RoHS compliant | Material: Stainless Steel |
| Tolerances (Unless Specified)<br>Decimal .XXX ± .005<br>.XX ± .010<br>Fraction ± .005<br>Angle ± 3°<br>Millimeters ± .13<br>Nylon ± .010<br>Metric Nylon ± .25 | Finish: Plain |

"The Good Guys"
Fascomp electronic hardware
1235 Tradeport Drive, Orlando, FL 32824
Tel: 407-226-2112 Fax: 407-226-3370
www.Fascomp.com