


# 5/32 Round Internal Thread Handles

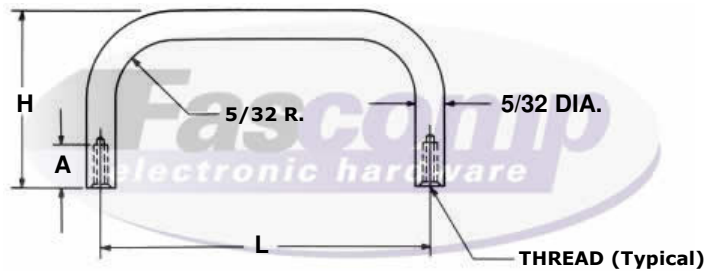

**Create a part number:**

Part	Thread	Material	Finish
FCXXXX	XXX	XX	XX

✓ FCXXXX	Length (L) +/- .031	Leg Height (H) +/- .031
FC8035	1	3/4
FC8036	1-1/4	3/4
FC8037	1-1/2	3/4
FC8038	2	3/4
FC8039	2-1/2	3/4
FC8040	3	3/4
FC8041	1	1
FC8042	1-1/4	1
FC8043	1-1/2	1
FC8044	1-3/4	1
FC8045	2	1
FC8046	2-1/2	1
FC8047	3	1

Thread (A)		
Short lengths, 'A' tapped to maximum depth		
✓ Code (XXX)	Thread	(A)
256	2-56	3/16
440	4-40	1/4 - 3/8

Material	
✓	Material Code (XX)
A	Aluminum
B	Brass
SS	Stainless Steel

✓	Compatible Finish	
	A, B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	A	6 - Iridite #14 Gold (MIL-C-5541E)
	A	7 - Iridite Clear (MIL-C-5541E)
	A	9 - Alodine 1200
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	A	22 - Clear Anodize (MIL-A-8625-TYPE2) (Sulphuric) Hot Water Seal (Clear)
	A	24 - Black Anodize (MIL-A-8625)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)

**Tolerances  
Unless otherwise Specified**  
 .xxx +/- .005  
 .xx +/- .010  
 Angular +/- 1 Degree  
 Linear +/- .005  
**Break all sharp edges**



Source Control Drawing:  
To be produced by  
Fascomp Electronic Hardware

This document is the property of Fascomp Inc. and shall not be reproduced, distributed or used as a basis for manufacturing without written permission from Fascomp Inc.