


Retainers—Type G

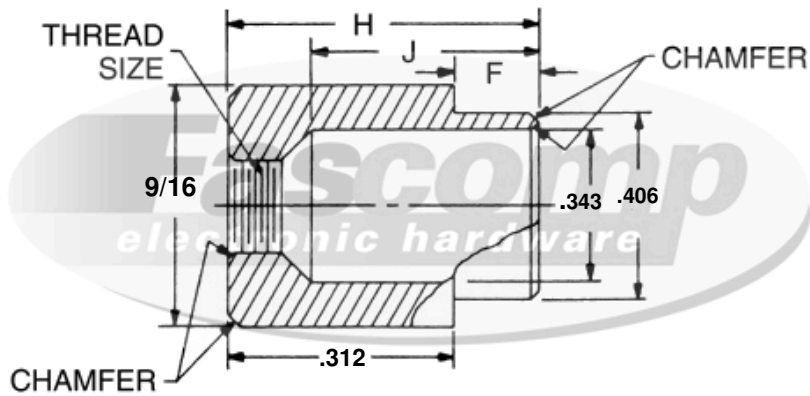

Create a part number:

Length	Material	Finish
FCXXXX-XXX	XX	XX
_____	_____	_____

Retainers Type G

	FCXXXX-XXX	Thread	Panel Thickness	F +.005 -.005	H +.010 -.010	J +.005 -.005
✓	FC1050-165	6-32	.109 - .140	.165	.477	.242
	FC1050-230	6-32	.171 - .203	.230	.542	.307
	FC1050-290	6-32	.234 - .265	.290	.602	.367
	FC1051-165	8-32	.109 - .140	.165	.477	.248
	FC1051-230	8-32	.171 - .203	.230	.542	.315
	FC1051-290	8-32	.234 - .265	.290	.602	.373
	FC1052-165	10-32	.109 - .140	.165	.477	.252
	FC1052-230	10-32	.171 - .203	.230	.542	.318
	FC1052-290	10-32	.234 - .265	.290	.602	.378
	FC1053-165	12-24	.109 - .140	.165	.477	.256
	FC1053-230	12-24	.171 - .203	.230	.542	.321
	FC1053-290	10-24	.234 - .265	.290	.602	.381
	FC1054-165	1/4-20	.109 - .140	.165	.477	.261
	FC1054-230	1/4-20	.171 - .203	.230	.542	.326
	FC1054-290	1/4-20	.234 - .265	.290	.602	.286

Material

Material		
✓ Material Code (XX)		
B	Brass	
S	Steel	
SS	Stainless Steel	

Compatible Finish

✓	B, S, SS	0 - Plain
	B, S	5 - Nickel Plate (QQ-N-290)
	B, S	12 - Zinc Clear (ASTM-B-633)
	B, S	16 - Electro Tin (MIL-T-10727 TYPE 1)
	SS	20 - Passivation (MIL-F-14072D)
	B, S, SS	26 - Black Oxide
	B, S	28 - Zinc Yellow (ASTM-B-633)

**Tolerances
Unless otherwise Specified**

.xxx +/- .005
.xx +/- .010
Angular +/- 1 Degree
Linear +/- .005

Break all sharp edges

This document is the property of Fascomp Inc. and shall not be reproduced, distributed, or used as a basis for manufacturing without written permission from Fascomp Inc.

Source Control Drawing:
To be produced by
Fascomp Electronic Hardware

